

4

**FAST RECOVERY, HIGH CURRENT 1-PHASE FULL WAVE BRIDGE RECTIFIER ASSEMBLIES**

**QUICK REFERENCE DATA**

- Low forward voltage drop
- Low reverse leakage current
- Low reverse recovery time
- Low thermal impedance
- High forward and surge current ratings


- $V_R = 50V - 400V$
- $I_F = 65A$
- $I_R = 12 \mu A$
- $t_{rr} = 150nS$

**ABSOLUTE MAXIMUM RATINGS**

Device Type	Working Reverse Voltage $V_{RWM}$	Average Rectified Current $I_{F(AV)}$						1 Cycle Surge Current $I_{FSM}$ $t_p = 8.3mS$		Repetitive Surge Current $I_{FRM}$
		(@ case temperature)			(@ ambient temperature)			@ 25°C	@ 100°C	
		@ 55°C	@ 100°C	@ 125°C	@ 25°C	@ 55°C	@ 100°C			
		Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	
SCAS05F	50									
SCAS1F	100	65	43	30	16	11.5	7.2	750	480	120
SCAS2F	200									
SCAS4F	400									

$R_{\theta JC} = 0.4^{\circ}C/W$

**MECHANICAL**

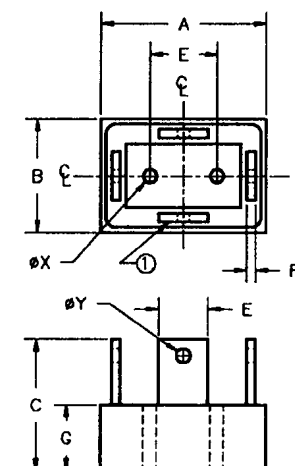

G27

DIM*	MM		INCHES		NOTE
	MIN	MAX	MIN	MAX	
A	-	64.3	-	2.53	-
B	-	45.5	-	1.78	-
C	-	51.6	-	2.03	-
D	24.6	26.2	0.97	1.03	-
E	-	19.8	-	0.78	-
F	-	3.31	-	0.13	-
G	24.6	26.2	0.97	1.03	-
ØX	4.3	5.9	1.71	2.31	2
ØY	4.0	5.6	1.59	2.19	3

NOTES:  
 ① A.C. TERMINAL 2 PLCS  
 2. 2 PLCS  
 3. 4 PLCS

Polarity marked on case

**ELECTRICAL CHARACTERISTICS**

Device Type	Maximum Reverse Leakage Current $I_R @ V_{RWM}$		Maximum Forward Voltage $V_F @ 18A/leg$	Reverse Recovery Time <sup>1</sup> $t_{rr} @ 25^\circ C$	Maximum operating & storage temp. range. $T_{OP} T_{STG}$
	@ 25°C	@ 100°C			
	μA	μA	Volts	nS	°C
SCAS05F SCAS1F SCAS2F SCAS4F	12	300	1.1	150	-55 to +150

4

<sup>1</sup> Measured on discrete devices prior to assembly

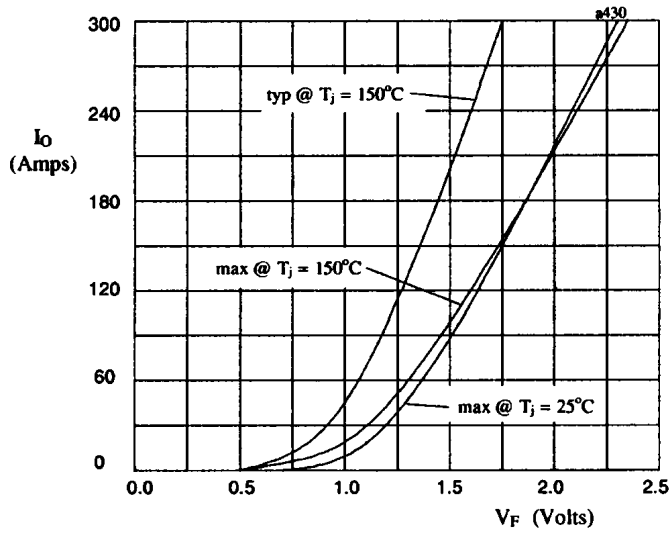


Fig 1. Forward voltage drop against output current per leg.

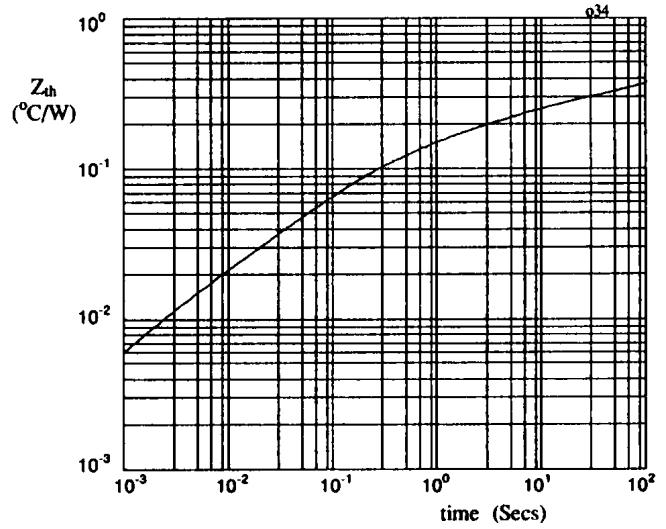


Fig 2. Transient thermal impedance characteristic per leg