

**HIGH CURRENT, HIGH DENSITY, SUPERFAST
RECOVERY SILICON POWER RECTIFIER STUD**

**QUICK REFERENCE
DATA**

- Very low reverse recovery time
- Low thermal impedance
- Low forward voltage drop
- High forward current applications
- High forward surge ratings

- $V_R = 50V - 150V$
- $I_F = 150A$
- $t_{rr} = 30nS$
- $I_{FSM} = 1800A$

3

ABSOLUTE MAXIMUM RATINGS & CHARACTERISTICS

Device Type *	Working Reverse Voltage (V_{RWM}) Volts	Average Rectified Current $I_F(AV)$					1 Cycle Surge Current $t_p = 8.3mS$ I_{FSM}		Repetitive Surge Current I_{FRM} Amps
		insert mounting			stud mounting	stud + insert mounting	@ 25°C	@ 100°C	
		@ 25°C	@ 55°C	@ 100°C	@ 55°C	@ 55°C	Amps	Amps	
SCSFF05	50	↑	↑	↑	↑	↑	↑	↑	↑
SCSFF10	100	150	130	85	105	190	1800	930	240
SCSFF15	150	↓	↓	↓	↓	↓	↓	↓	↓

Normal polarity is cathode to stud


* add suffix "R" to part number for reverse polarity

Operating temperature range -55 °C to +150 °C

Storage temperature range -55 °C to +150 °C

Device Type	Reverse Leakage Current $I_R @ V_{RWM}$		Forward Voltage $V_F @ 100A$	Reverse Recovery Time ⁽¹⁾
	@ 25°C	@ 100°C	@ 25°C	@ 25°C
	µA	mA	Volts	nS
SCSFF05	↑	↑	↑	↑
SCSFF10	120	6.0	1.1	30
SCSFF15	↓	↓	↓	↓

MECHANICAL

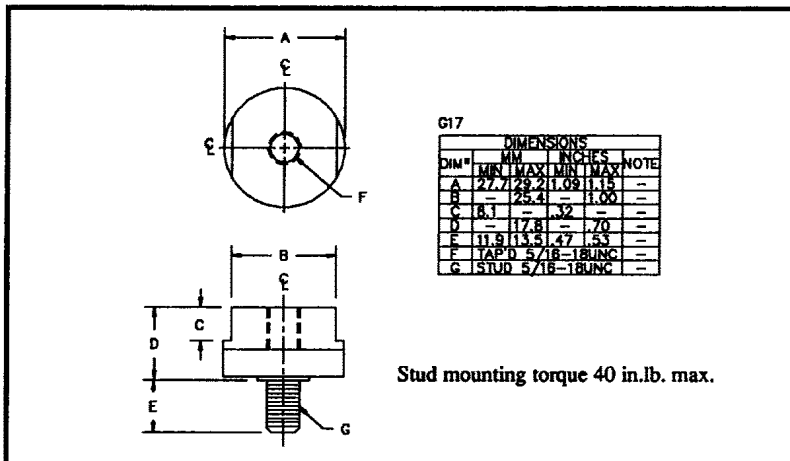

1) Measured on discrete devices prior to assembly.

Maximum thermal impedances

Stud mounted $R_{\theta JC} < 0.67^{\circ}C/W$

Insert mounted $R_{\theta JC} < 0.5^{\circ}C/W$

Stud + insert mtd $R_{\theta JC} < 0.28^{\circ}C/W$

3

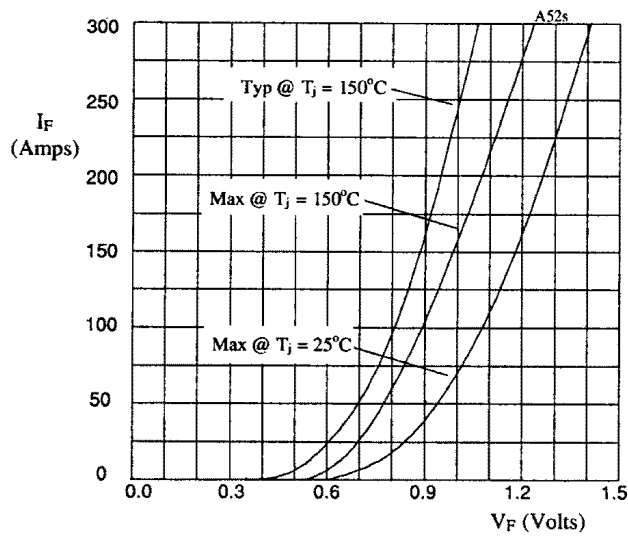


Fig 1. Forward voltage drop as a function of forward current.

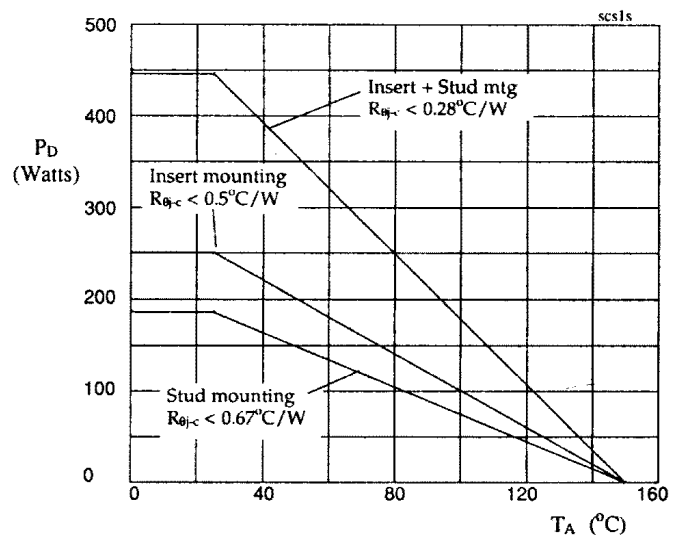


Fig 2. Power dissipation as a function of ambient temperature for different mountings.

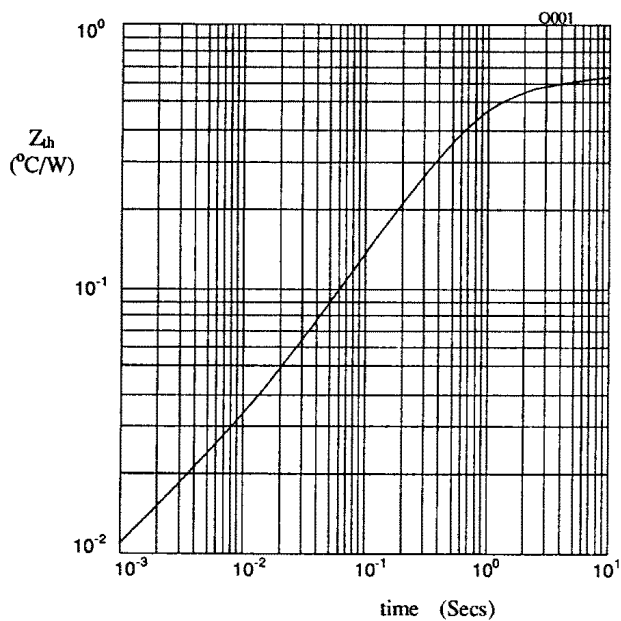


Fig 3. Transient thermal impedance characteristic when stud mounted.

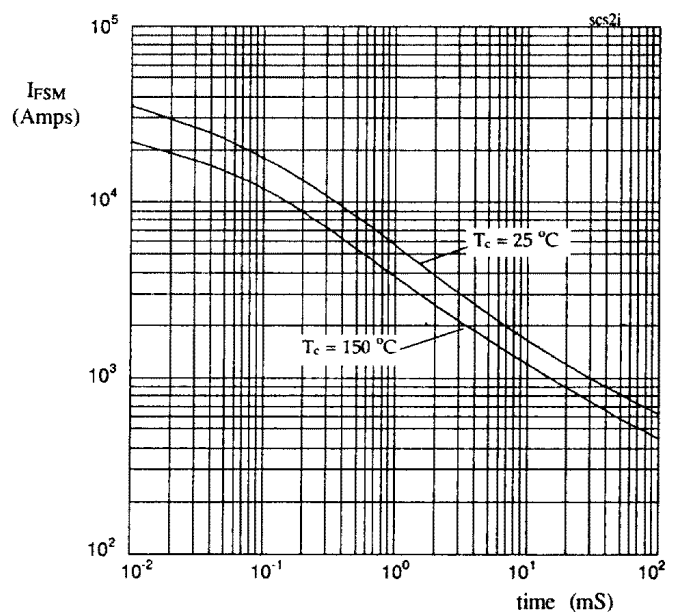


Fig 4. Maximum non-repetitive surge current against pulse width.

**HIGH CURRENT, HIGH DENSITY, STANDARD
RECOVERY SILICON POWER RECTIFIER STUD**

- Low thermal impedance
- Low forward voltage drop
- High current applications
- Low reverse leakage current
- High surge ratings

**QUICK REFERENCE
DATA**

- $V_R = 50V - 1000V$
- $I_F = 150A$
- $I_R = 12.0\mu A$
- $I_{FSM} = 1800A$


ABSOLUTE MAXIMUM RATINGS

Device Type *	Working Reverse Voltage (V_{RWM})	Average Rectified Current $I_{F(AV)}$					1 Cycle Surge Current I_{FSM} $t_p = 8.3mS$		Repetitive Surge Current I_{FRM}
		insert mounting			stud mounting	stud + insert mounting	@ 25°C	@ 100°C	
		@ 25°C	@ 55°C	@ 100°C	@ 55°C	@ 55°C			
		Volts	Amps	Amps	Amps	Amps	Amps	Amps	
SCSM05	50	↑	↑	↑	↑	↑	↑	↑	
SCSM1	100	↑	↑	↑	↑	↑	↑	↑	
SCSM2	200	↑	↑	↑	↑	↑	↑	↑	
SCSM4	400	150	110	70	95	175	1800	840	250
SCSM6	600	↓	↓	↓	↓	↓	↓	↓	↓
SCSM8	800	↓	↓	↓	↓	↓	↓	↓	↓
SCSM0	1000	↓	↓	↓	↓	↓	↓	↓	↓

Normal polarity is cathode to stud

* add suffix "R" to part number for reverse polarity

MECHANICAL

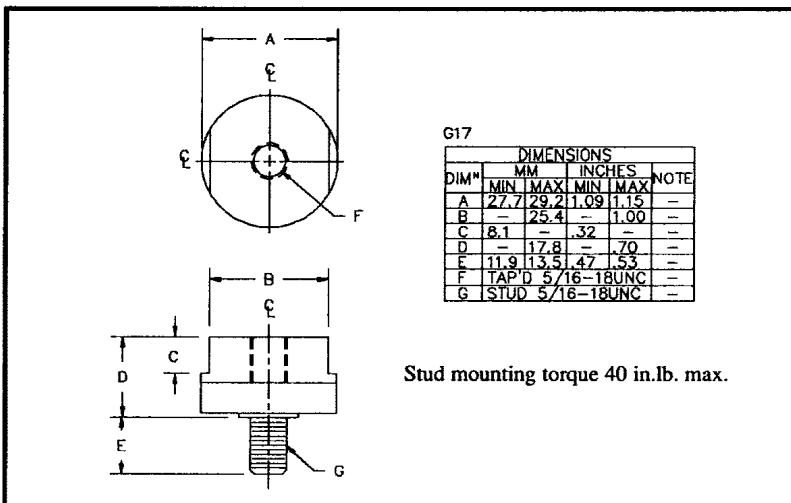

Maximum thermal impedances

Stud mounted $R_{\theta JC} < 0.67^{\circ}C/W$

Insert mounted $R_{\theta JC} < 0.5^{\circ}C/W$

Stud + insert mtd $R_{\theta JC} < 0.28^{\circ}C/W$