

POWER DISCRETES

Description

Quick reference data

PIV = 5KV

I_F@ 55°C = 0.6A

I_R = 10µA (max.)

Features

- ◆ 3 way terminals
- ◆ Insulated Aluminium Mounting
- ◆ For commercial and industrial applications such as power supplies for microwave ovens.
- ◆ Corona free design

Absolute Maximum Ratings

Device Type	Peak Inverse Voltage Per Leg@ 55°C	Average Rectified Current@ 55°C	Maximum Forward Voltage@250MA/Leg@ 25°C	1 Cycle Surge Current @ 55°C	Reverse Current@ PIV@ 25°C	Case Length (A)
	Amps	Amps	Volts	Amps	uAmps	Inches
SDHD5K	5KV	1.2	7	35	10	3.36

Note:

Operating temperature range: -55°C to +150°C.

Storage temperature range: -55°C to +150°C.

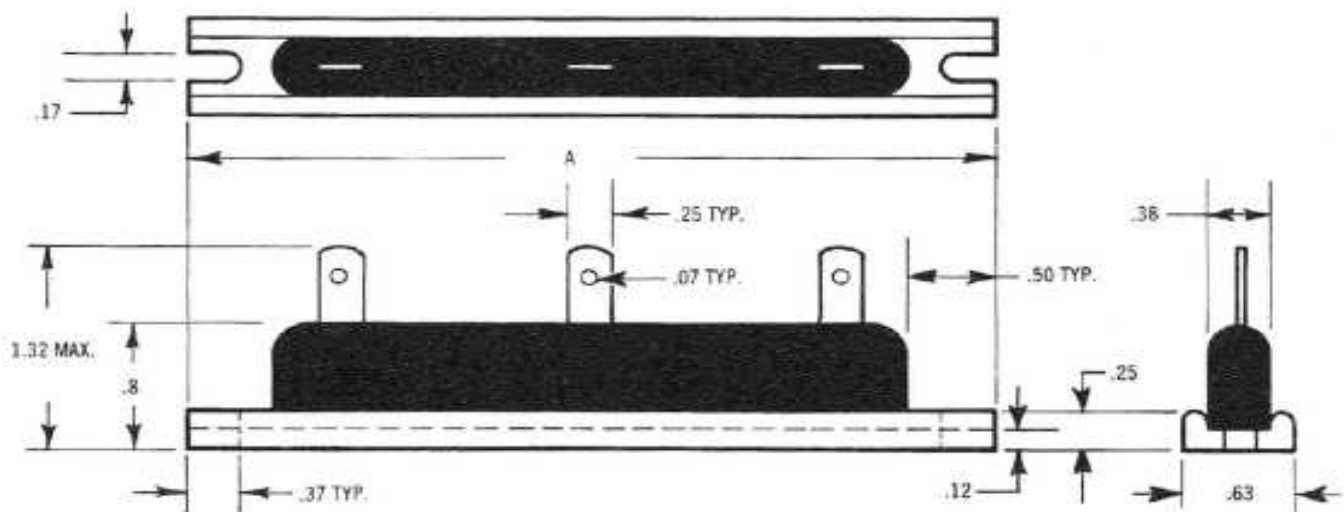
POWER DISCRETES
Order Information

Part Number	Description
SDHD5K	Rectifier Assembly ⁽¹⁾

Electrical specifications @ $T_A = 25^\circ\text{C}$ unless otherwise specified.

Note:

(1) Available in boxed packaging. Please consult factory for quantities.

Outline Drawing


Note: Units should be mounted with suitable grease

TOLERANCE : ± 0.030